

PG INSPECTION

ECHNOLOGIES

## TYPES OF **CUTTING TOOLS**

• PG INSPECTION

• Micro tools • Step drills

# TYPES OF

# **MEASUREMENTS**

- 50+ Preset Calculations/Measurements
  - Distances • Radii

Angles

• Diameter

Comparisons

- Inserts
- Taps

• Drills

 Reamers • End mills

- Custom tooling
- Screws/bolts

# **APPLICATIONS**

- Quick checks on the shop floor next to CNC grinding machines
- Advanced geometry and visual inspections in the metrology laboratory
- Creating reports for incoming/outgoing quality control
- Scenes and Inspections software feature for testing large quantity tool runs
  - Create inspection macro to control testing process ensuring accurate & repeatable tests

### **Optical Cutting Tool Inspection** System with **REACTION** Software For micro tools Ø 0.015 - 0.30" (0.381 - 7.5mm)

The PG1000-400-1.3X is a tool geometry inspection system durable enough for everyday shop floor use and precise enough for a metrology laboratories incoming and outgoing quality inspections. The 5MP camera reproduces and displays high resolution cutting tool images magnified up to 415x on a 4K monitor.

All PG1000-400 systems collect and display data from the horizontal (X), vertical (Y), base block/ tool holder rotational position (A), crosshair rotation (Z), focus (F) and microscope magnification (M) axis's as well as allow for optional lighting control through the software.

The PGI000-400 REACTION software allows the user to measure tool geometries in multiple ways.

- Screen: take measurements by picking points on the monitors screen
- Scales: use the X & Y axis handwheels to mark points and take measurements via the scales
- Edge Detection: this popular feature allows the software to detect the tools edges when taking measurements which helps to automate the process and virtually eliminates human error
- **Comparisons:** the software can create comparison geometries for quick referencing (Go/No-Go)
- DXF/DWG file: import overlay for tool size comparisons
- CTM file: Create and save tool image to use as an overlay for tool alignment and inspections

The PG REACTION software is very user friendly and incorporates on screen prompts, instructions and video demos for each tool calculation. Calculations can be repeated efficiently by recalling previous saved inspection scenes. Annotations/notes can be added alongside measurements.



With the click of an icon the software can export data to an Excel/CSV file or create a customized PDF report with results and user entered tolerances, images, customer details as well as an optional PASS/ FAIL notification.

For more information visit: www.pgl000.com


# PG1000-400-1.3X

#### **Features:**


- Quick measurements taken in less than 30 seconds
- Extremely accurate and repeatable
- User friendly software interface
- Flexibility during inspection inspections done your way
- Live image calculations
- Snap to edges (auto edge detection)
- Edge detection (rotational w/concentricity fixture)
- 50+ calculations/measurements available in software
- Perform multiple calculations over a single image
- Create inspection macro templates
- DXF/DWG overlay software lockable to scale movement
- DXF/DWG data collection
- Tool comparisons

.015" End Mill

- Customizable PDF inspection reports
- Export results and data as Excel or CSV file
- Magnifications automatically synchronized to PC
- Center of tool focus indication
- Tool position in degrees displayed in software
- Certified granite base
- High precision linear bearings for all axis
- 270° pivoting base block for tool holding fixtures
- Free software upgrades (as hardware permits)
- All units delivered fully calibrated and ready for use
- I year warranty
- MADE IN USA

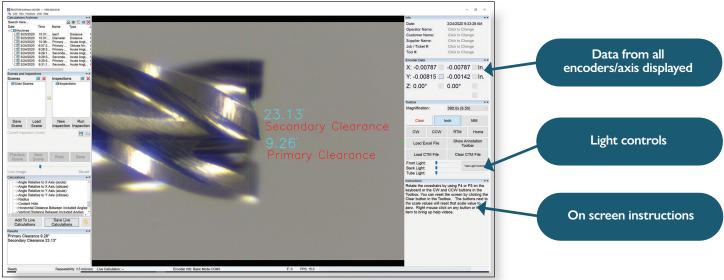

Primary and Secondary Clearance Angle at 390X zoom

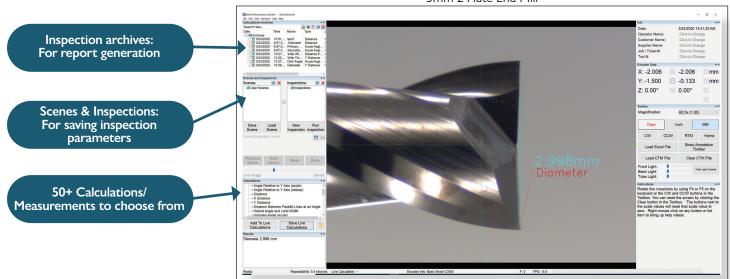

3mm 2 Flute End Mill

Diameter at 60X zoom

| Specifications:   |                                |   |                  |                             |                                   |                  |  |                          |
|---|--------------------------------|---|------------------|-----------------------------|-----------------------------------|------------------|--|--------------------------|
| Scope<br>Magnification:   |                                | Recommended<br>Tool Size:                               |                  | Camera:                     | Computer:                         |                  | Monitor:                               | Operating<br>System:     |
| 35x 150x 276x 390x<br>60x 186x 308x 415x<br>85x 213x 340x<br>121x 245x 368x |                                | 0.015 - 0.30''<br>(0.381 - 7.5mm)<br>flute up to 7.5''L |                  | 5MP color<br>camera         | High perf<br>w/ REA<br>software r |                  | 27'' 4K Ultra HD                       | Windows 10<br>64 bit     |
| Scales:   | Power:                         | Language:   |                  | Accuracy/<br>Repeatability: |                                   | Measuring Range: |  | Dimensions:<br>Weight:   |
| Fagor Iµ  | OVac 60Hz<br>(220Vac optional) | English<br>Spanish<br>Chinese                           | Germa<br>Japanes | se at ma                    |                                   |                  | l: 3.35'' (85mm)<br>al: 7.87'' (200mm) | 24''×19''×18''<br>140lbs |

Specifications




# PG 1000-400-1.3X Common Accessories:



### Lighting:

| 1000-648   | Eight quadrant LED illumination tube<br>controlled by PC/software |
|------------|---|
| 1000-661-1 | LED ring light controlled by PC/software                          |

1000-662 LED back light controlled by PC/software





p/n 1000-648

p/n 1000-661



p/n 1000-662

#### Calibration:

- 1000-443 Standard calibration reticle. For screen calibration and 50mm x 50mm area of scale calibration.
- 1000-645-1 Linear segmented calibration reticle. For screen calibration and the full working area of the microscope: 85mm x 200mm.

# Hardware:

- 00030-3MA Short V block insert for small tools, 1.5" (38mm) L
- 00257-IMB Mini V block insert for micro tools (1 - 3mm shank)
- 1000-571 Concentricity fixture with quarter 'zero-style' plain precision rollers, top roller and backstop for small/micro tools. Shank/tool size range: 0.010'' - 1.000''





p/n 00030-3MA







p/n 1000-571

1000-571 rollers

# **Other Options:**

00087-3P 03048-01

35Watt UPS/Surge protection device Custom 48''L x 30''D PG1000 workbench



p/n 1000-443

p/n 1000-645-1



